



Verso R 1300 F C5

Nominal air flow according to ErP 2018, m ³ /h	1025
Nominal air flow according to ErP 2018, l/s	285
Electric air heater capacity, kW / Δt, °C	3/5,9
Supply voltage HE, V	3~400
Supply voltage HW, V	1~230
Maximal operating current HE, A	8,9
Maximal operating current HW, A	4,9
Power supply cable E, mm ²	5×1,5
Power supply cable W, mm ²	3×1,5
Electric power input of the fan drive at maximum flow rate, W	533
Noise power level, L _{WA} , dB(A)	54
Noise pressure level, L _{PA} , dB(A), (3 m)	42
Filters dimensions B×H×L, mm	410×420×46
Supply filter class	ePM1 60 (F7)
Exhaust filter class	ePM10 50 (M5)
Unit dimensions B×H×L, mm	940×480×1360
Panel thickness, mm	50
Maintenance space, mm	400
Unit weight, kg	144

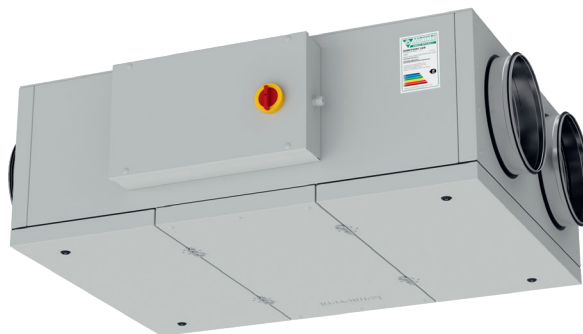

Performance

Verso R 1300 F with standard equipment

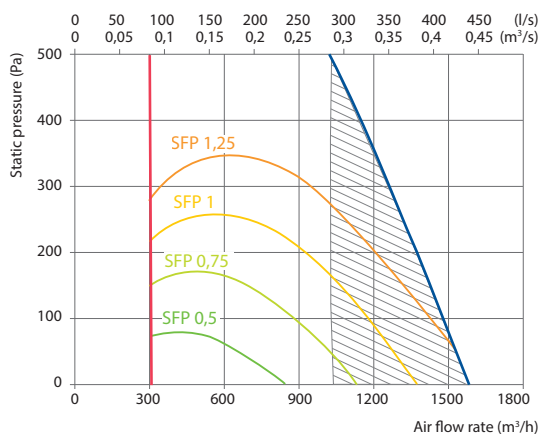


Does not conform to ErP2018 requirements

Accessories

Closing damper	AGUJ-M-315+LF24/LM24
Silencer	ODA/EHA AGS-315-100-900-M
	SUP/ETA AGS-315-100-1200-M
Water heater	DH-315
PPU	PPU-HW-3R-15-1,0-W2
Water cooler	DCW-1,2-8
Water heater-cooler	DHCW-315
2-way valve	VVP47.15-2,5+SSF161.05HF
DX cooler	DCF-1,2-8
Cooling unit for ducted cooler	MOU-24HFN8a+KA8142

Mounting positions



2 3 with water heater only

Temperature efficiency

Outside temperature, °C	Winter					Summer		
	-23	-15	-10	-5	0	25	30	35
After heat exchanger, °C	13,4	14,9	15,9	16,9	17,8	22,6	23,5	24,5


Indoor +22 °C, 20 % RH

Hot water duct air heater *


Water temperature in/out, °C	Winter		
	80/60	70/50	60/40
Capacity, kW	3	3	3
Flow rate, dm ³ /h	132	131	131
Pressure drop, kPa	3,5	3,5	3,6
Temperature in/out, °C	13,4 / 22,0		
Maximal capacity, kW	10,9	8,9	6,8
Connection, "	½		

* Option

Shown as right (R1)
View from inspection side

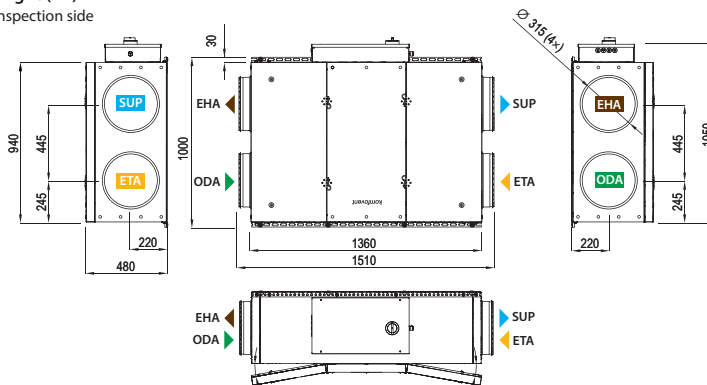

Shown as left (L1)

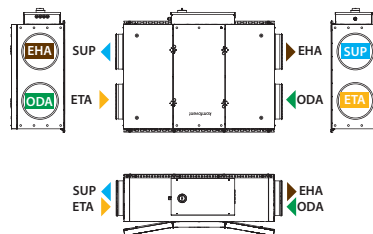

▶ ODA – outdoor intake ▶ SUP – supply air ▶ ETA – extract indoor ▶ EHA – exhaust air