



# Domekt R 250 F C8

Maximal air flow, m <sup>3</sup> /h	250
Maximal air flow, l/s	69
Reference flow rate, m <sup>3</sup> /s	0,049
Reference pressure difference, Pa	50
SPI, W/(m <sup>3</sup> /h)	0,39
Thermal efficiency of heat recovery, %	80
Electric air heater capacity, kW / Δt, °C	1/15,9
Supply voltage, V	1~230
Maximal operating current HE, A	6
Power supply cable, mm <sup>2</sup>	3×1,5
Electric power input of the fan drive at maximum flow rate, W	78
Electric power input of the fan drive at reference flow rate, W	34
Noise power level, L <sub>WA</sub> , dB(A)	48
Noise pressure level, L <sub>PA</sub> , dB(A), (3 m)	37
Filters dimensions BxHxL, mm	278×258×46
Supply filter class	ePM1 60 (F7)
Exhaust filter class	ePM10 50 (M5)
Unit dimensions BxHxL, mm	602×310×842
Maintenance space, mm	300
Unit weight, kg	42



## Performance

Unit with standard equipment

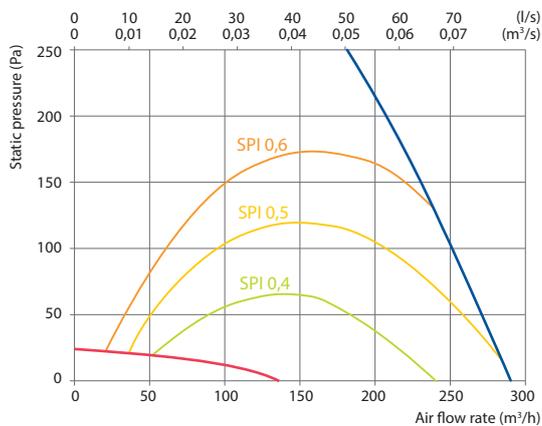


## Temperature efficiency

	Winter					Summer		
Outdoor temperature, °C	-23	-15	-10	-5	0	25	30	35
After heat exchanger, °C	13,0	14,6	15,6	16,6	17,6	22,6	23,6	24,6

indoor +22 °C, 20 % RH


Shown as right (R1)  
View from inspection side

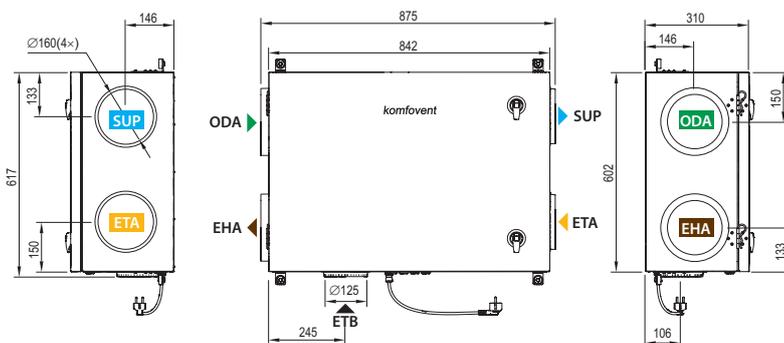


## Accessories

Closing damper	AGUJ-M-160+TF230/CM230
Silencer	ODA/EHA ASTS-160-600-M
	SUP/ETA ASTS-160-900-M
Water heater	DH-160
PPU	PPU-HW-3R-15-0,4-W2
2-way valve (heater)	VVP47.10-0,4+SSF161.05HF
2-way valve (cooler)	VVP47.10-1,6+SSF161.05HF
Outdoor grill	LD-160
Water heater-cooler	DHCW-160

## Mounting positions



Shown as left (L1)

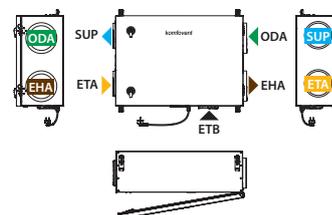

▶ ODA – outdoor intake      ▶ SUP – supply air      ▶ ETA – extract indoor      ▶ EHA – exhaust air      ▶ ETB – additional extraction connection (by-pass – extraction without heat recovery)